

# Technical Accessory Guides (TAGs)

For Associates, Resellers, ISVs and Alliance Partners

Global



Version: Active-Only

Will only show products that are known to be available for sale

Need to provide an update or change?  
Contact <mailto:pgw786@zebra.com>



For Internal Use by  
**PartnerConnect Members Only**



## TC53/TC58 Series Technical Accessory Guide



Does not include TC51/TC52/TC52x/TC52ax/TC56/TC57/TC57x accessories. See separate guide for these TC5X series accessories.  
Does not include TC55 accessories. See separate guide for TC55 accessories.

**NOTE:** This document is only for general reference. Solutions Pathway and related PMBs should be used for product availability, pricing, and final solution selection.




\* Zebra does not endorse or specifically recommend any **third-party products, accessories, or hardware**. ZEBRA DISCLAIMS ANY AND ALL LIABILITY, INCLUDING ANY EXPRESS OR IMPLIED WARRANTIES, WHETHER ORAL OR WRITTEN, FOR SUCH THIRD PARTY PRODUCTS, ACCESSORIES, OR HARDWARE. THE CUSTOMER ACKNOWLEDGES THAT NO REPRESENTATION HAS BEEN MADE BY ZEBRA AS TO THE FITNESS OF THE THIRD-PARTY PRODUCTS, ACCESSORIES, OR HARDWARE FOR THE CUSTOMER'S INTENDED PURPOSE.




### Cradles and Charging

#### Single Device Cradles

Part Number	Picture	Description	Notes	Required Items
CRD-NGTC5-2SC1B		Single Slot Charge-Only ShareCradle KIT	<ul style="list-style-type: none"> <li>▶ Will charge TC53/TC58 and a spare battery.</li> <li>▶ Will charge standard size battery in device from 0-90% in as little as 1.5 hours</li> <li>▶ Compatible with devices units with hand strap, Rugged Boot, Trigger Handle attached.</li> <li>▶ Kit includes:               <ul style="list-style-type: none"> <li>- Single Slot Charge-Only Cradle (CRD-NGTC5TC7-2SC1B)</li> <li>- Power Supply (PWR-BGA12V50W0WW)</li> <li>- DC Line Cord (CBL-DC-388A1-01)</li> <li>- shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5)</li> </ul> </li> <li>▶ Connects to charge contacts on bottom of device.</li> </ul>	<ul style="list-style-type: none"> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul>
CRD-NGTC5-2SE1B		Single Slot USB/Charging Cradle KIT	<ul style="list-style-type: none"> <li>▶ Will charge TC53/TC58 and a spare battery.</li> <li>▶ Will charge standard size battery in device from 0-90% in as little as 1.5 hours</li> <li>▶ Compatible with devices units with hand strap, Rugged Boot, Trigger Handle attached.</li> <li>▶ Kit includes:               <ul style="list-style-type: none"> <li>- Single Slot USB/Charging Cradle (CRD-NGTC5TC7-2SE1B)</li> <li>- Power Supply (PWR-BGA12V50W0WW)</li> <li>- DC Line Cord (CBL-DC-388A1-01)</li> <li>- shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5)</li> </ul> </li> <li>▶ Connects to charge contacts and USB-C port on bottom of device.</li> <li>▶ Can be enhanced to provide Ethernet communications by installing USB to Ethernet Module (MOD-MT2-EU1-01).</li> </ul>	<ul style="list-style-type: none"> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> <li>▶ <b>For USB communication:</b> Micro USB Cable (25-124330-01R)</li> </ul>

<p>CRD-NTC5X-1SNWS-01</p>		<p>Workstation Connect Cradle</p>	<ul style="list-style-type: none"> <li>▶ An enhanced single-slot charging cradle allowing users to use the TC53/TC58 as a workstation or kiosk.</li> <li>▶ Cradle includes the following additional ports: <ul style="list-style-type: none"> <li>- HDMI</li> <li>- Ethernet</li> <li>- 4 USB ports for keyboard, mouse, and other supported USB devices.</li> </ul> </li> <li>▶ Includes shims allowing for use on devices with or without boot.</li> <li>▶ Connects to I/O connector on rear of device.</li> <li>▶ Cover on rear of cradle can be secured using screw to prevent unauthorized access to ports.</li> <li>▶ Not compatible with snap-on accessories.</li> </ul>	<ul style="list-style-type: none"> <li>▶ Power Supply (PWR-BGA12V50W0WW)</li> <li>▶ DC Line Cord (CBL-DC-388A2-01).</li> <li>- CBL-DC-388A1-01 may also be used, but CBL-DC-388A2-01 is recommended to provide easier installation of peripheral cables and the cradle's port cover.</li> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul>
<p>CRD-NTC5X-1SNHP-01</p>		<p>Point of Sale (PoS) Connect Cradle</p>	<ul style="list-style-type: none"> <li>▶ A hybrid point of sale cradle allowing users to use the TC53/TC58 as a point of sale terminal.</li> <li>▶ Cradle includes the following additional ports: <ul style="list-style-type: none"> <li>- HDMI</li> <li>- Ethernet</li> <li>- 3 USB ports for keyboard, mouse, and other supported USB devices.</li> <li>- 1 24V powered USB port</li> <li>- 2 12V powered USB ports</li> </ul> </li> <li>▶ Includes shims allowing for use on devices with or without boot.</li> <li>▶ Connects to I/O connector on rear of device.</li> <li>▶ Cover on rear of cradle can be secured using screw to prevent unauthorized access to ports.</li> <li>▶ Not compatible with snap-on accessories.</li> </ul>	<ul style="list-style-type: none"> <li>▶ Power Supply (PWR-BGA24V150W1WW)</li> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul>
<p>MOD-MT2-EU1-01</p>		<p>USB to Ethernet Module</p>	<ul style="list-style-type: none"> <li>▶ Attaches to USB/Charging ShareCradle (CRD-NGTC5TC7-2SE1B) to provide Ethernet support</li> <li>▶ Mechanical switch selects between USB B port and RJ45 Ethernet jack.</li> <li>▶ 10/100/1000 Mbps speed</li> <li>▶ LEDs on module indicate connectivity and speed.</li> </ul>	<p>USB/Charging ShareCradle Kit (CRD-NGTC5-2SE1B)</p>
<p><b>Multi-Device Cradles</b></p>				
Part Number	Picture	Description	Notes	Required Items






CRDON-NGTC5-5SC5D		5-Slot Charge-Only ShareCradle	<ul style="list-style-type: none"> <li>▶ Will charge up to five devices.</li> <li>▶ Will charge standard battery in device from 0-90% in as little as 1.5 hours.</li> <li>▶ Does not charge spare batteries</li> <li>▶ Compatible with devices with hand strap, Rugged Boot, or Trigger Handle attached.</li> <li>▶ includes: <ul style="list-style-type: none"> <li>- 5-Slot Charge-Only Cradle (CRD-NGTC5TC7-5SC5D)</li> <li>- shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5) - QTY 5</li> </ul> </li> <li>▶ Can be racked/ mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01)</li> <li>▶ Connects to charge contacts on bottom of device.</li> </ul>	<ul style="list-style-type: none"> <li>▶ Power Supply (PWR-BGA12V108W0WWW)</li> <li>▶ DC Line Cord (CBL-DC-381A1-01)</li> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul>
CRD-NGTC5-5SC5D		5-Slot Charge-Only ShareCradle KIT	<ul style="list-style-type: none"> <li>▶ Will charge up to five devices.</li> <li>▶ Will charge standard battery in device from 0-90% in as little as 1.5 hours.</li> <li>▶ Does not charge spare batteries</li> <li>▶ Compatible with devices with hand strap, Rugged Boot, or Trigger Handle attached.</li> <li>▶ Kit includes: <ul style="list-style-type: none"> <li>- 5-Slot Charge-Only Cradle (CRD-NGTC5TC7-5SC5D)</li> <li>- Power Supply (PWR-BGA12V108W0WWW)</li> <li>- DC Line Cord (CBL-DC-381A1-01)</li> <li>- shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5) - QTY 5</li> </ul> </li> <li>▶ Can be racked/ mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01)</li> <li>▶ Connects to charge contacts on bottom of device.</li> </ul>	<ul style="list-style-type: none"> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul>
CRDON-NGTC5-5SC4B		5-Slot Charge-Only ShareCradle with Spare Battery Charging slot	<ul style="list-style-type: none"> <li>▶ Will charge up to four devices and four spare batteries.</li> <li>▶ Will charge standard battery in device from 0-90% in as little as 1.5 hours.</li> <li>▶ Compatible with devices with hand strap, Rugged Boot, or Trigger Handle attached.</li> <li>▶ includes: <ul style="list-style-type: none"> <li>- 5-Slot Charge-Only ShareCradle with Spare Battery Charger (CRD-NGTC5TC7-5SC4B)</li> <li>- shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5) - QTY 4</li> </ul> </li> <li>▶ Can be racked/ mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01)</li> <li>▶ Connects to charge contacts on bottom of device.</li> </ul>	<ul style="list-style-type: none"> <li>▶ Power Supply (PWR-BGA12V108W0WWW)</li> <li>▶ DC Line Cord (CBL-DC-381A1-01)</li> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul>

<p>CRD-NGTC5-5SC4B</p>		<p>5-Slot Charge-Only ShareCradle with Spare Battery Charging slot KIT</p>	<ul style="list-style-type: none"> <li>▶ Will charge up to four devices and four spare batteries.</li> <li>▶ Will charge standard battery in device from 0-90% in as little as 1.5 hours.</li> <li>▶ Compatible with devices with hand strap, Rugged Boot, or Trigger Handle attached.</li> <li>▶ Kit includes: <ul style="list-style-type: none"> <li>- 5-Slot Charge-Only ShareCradle with Spare Battery Charger (CRD-NGTC5TC7-5SC4B)</li> <li>- Power Supply (PWR-BGA12V108W0WW)</li> <li>- DC Line Cord (CBL-DC-381A1-01)</li> <li>- shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5) - QTY 4</li> </ul> </li> <li>▶ Can be racked/ mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01)</li> <li>▶ Connects to charge contacts on bottom of device.</li> </ul>	<ul style="list-style-type: none"> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul>
<p>CRDON-NGTC5-5SE5D</p>		<p>5-Slot Ethernet/Charging ShareCradle</p>	<ul style="list-style-type: none"> <li>▶ Allows network speeds up to 1 Gb</li> <li>▶ Will charge standard battery in device from 0-90% in as little as 1.5 hours.</li> <li>▶ Does not charge spare batteries</li> <li>▶ Compatible with devices with hand strap, Rugged Boot, or Trigger Handle attached.</li> <li>▶ Kit includes: <ul style="list-style-type: none"> <li>- 5-Slot Ethernet+Charge Cradle (CRD-NGTC5TC7-5SE5D)</li> <li>- shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5) - QTY 5</li> </ul> </li> <li>▶ Can be racked/ mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01)</li> <li>▶ Connects to charge contacts and USB-C port on bottom of device.</li> </ul>	<ul style="list-style-type: none"> <li>▶ Power Supply (PWR-BGA12V108W0WW)</li> <li>▶ DC Line Cord (CBL-DC-381A1-01)</li> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul>
<p>CRD-NGTC5-5SE5D</p>		<p>5-Slot Ethernet/Charging ShareCradle KIT</p>	<ul style="list-style-type: none"> <li>▶ Allows network speeds up to 1 Gb</li> <li>▶ Will charge standard battery in device from 0-90% in as little as 1.5 hours.</li> <li>▶ Does not charge spare batteries</li> <li>▶ Compatible with devices with hand strap, Rugged Boot, or Trigger Handle attached.</li> <li>▶ Kit includes: <ul style="list-style-type: none"> <li>- 5-Slot Ethernet+Charge Cradle (CRD-NGTC5TC7-5SE5D)</li> <li>- Power Supply (PWR-BGA12V108W0WW)</li> <li>- DC Line Cord (CBL-DC-381A1-01)</li> <li>- shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5) - QTY 5</li> </ul> </li> <li>▶ Can be racked/ mounted in a standard 19 inch rack system via the mounting accessory (BRKT-SCRD-SMRK-01)</li> <li>▶ Connects to charge contacts and USB-C port on bottom of device.</li> </ul>	

<p>RAM-GDS-DOCK-6G15P (3rd party) *</p> <p><a href="https://www.rammount.com">https://www.rammount.com</a></p>		<p>RAM GDS® Technology™ 6-Slot Charge-Only Dock</p>	<ul style="list-style-type: none"> <li>▶ Will charge up to 6 devices.</li> <li>▶ Uses RAM GDS® Technology™ allowing compatible devices with RAM IntelliSkin Adapter to use the same cradle. Includes TC22/TC27, TC53/TC58 and TC73/TC78.</li> <li>▶ Includes power supply with US AC Line Cord.</li> </ul>	<p>▶ RAM IntelliSkin® Adapter (RAM-GDS-SKIN-ZE34)</p>
<p>RAM-GDS-DOCK-6G15P-RJ45 (3rd party) *</p> <p><a href="https://www.rammount.com">https://www.rammount.com</a></p>		<p>RAM GDS® Technology™ 6-Slot Charge + Ethernet Dock</p>	<ul style="list-style-type: none"> <li>▶ Will charge up to 6 devices and provides an RJ45 Ethernet port to each cradle cup position.</li> <li>▶ Uses RAM GDS® Technology™ allowing compatible devices with RAM IntelliSkin Adapter to use the same cradle. Includes TC22/TC27, TC53/TC58 and TC73/TC78.</li> <li>▶ Includes power supply with US AC Line Cord.</li> </ul>	<p>▶ RAM IntelliSkin® Adapter (RAM-GDS-SKIN-ZE34)</p>
<p>BRKT-SCRD-SMRK-01</p>		<p>5-Slot ShareCradle Mounting Bracket</p>	<ul style="list-style-type: none"> <li>▶ Allows for rack and wall mounting of one 5-Slot ShareCradle, up to four Single Slot ShareCradles, or up to four 4-Slot Battery Chargers.</li> <li>▶ Bracket can be mounted on standard 19" network rack or on a wall.</li> <li>▶ Has cable routing slots and removable power supply tray that stores and conceals power supplies.</li> <li>▶ Adjustable tabs &amp; screw mounts for easy hanging/installation.</li> <li>▶ Adjustable orientations: - 25° High Density (5-Slot Charge Only Cradle) - Horizontal (Single Slot Cradle or 4-Slot Battery Chargers).</li> <li>▶ See the Bluetooth-Generic Accessories TAG for info on 3rd party Network Racks that can be used for mounting this bracket.</li> </ul>	
<p>ADP-TC7X-PLT-FX</p>		<p>5-Slot ShareCradle Mounting Bracket Adapter Plate for Honeywell</p>	<ul style="list-style-type: none"> <li>▶ Allows Zebra Multi-Slot ShareCradles to be mounted on legacy Honeywell Flex Cradle Wall Mount Brackets (HON SKU #203-641-002).</li> <li>▶ Includes hardware to attach plate to HON wall bracket and secure ShareCradle to plate.</li> <li>▶ <b>NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</b></li> </ul>	


**Misc. Cradle Accessories**

Part Number	Picture	Description	Notes	Required Items
-------------	---------	-------------	-------	----------------


<p>CRDCUP-NGTC5-01 (single cup)</p> <p>CRDCUP-NGTC5-05 (set of 5 cups)</p>		<p>TC53/TC58 Charge-Only ShareCradle Cup Conversion Kit</p>	<ul style="list-style-type: none"> <li>▶ Can be used to replace a legacy TC5X series cradle cup when migrating from legacy TC5X to TC53/TC58.</li> <li>▶ Can also be used to replace a damaged cradle cup or to create a multi-slot cradle supporting a mixed combination of devices (i.e. two TC21/TC26 and three TC53/TC58).</li> <li>▶ Only compatible with cradles that use ShareCradle design (i.e. TC5X series).</li> <li>▶ Kit includes: <ul style="list-style-type: none"> <li>- ShareCradle Cup (CRDCUP-NGTC5TC7)</li> <li>- shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5)</li> <li>- screw for attaching cup to cradle</li> </ul> </li> </ul>	
<p>CRDCUP-NGTC5ETH-01 (single cup)</p> <p>CRDCUP-NGTC5ETH-05 (set of 5 cups)</p>		<p>TC53/TC58 Charge + Communication ShareCradle Cup Conversion Kit</p>	<ul style="list-style-type: none"> <li>▶ Can be used to replace a legacy TC5X series cradle cup when migrating from legacy TC5X to TC53/TC58.</li> <li>▶ Supports charging and USB/Ethernet communication.</li> <li>▶ Can also be used to replace a damaged cradle cup or to create a multi-slot cradle supporting a mixed combination of devices (i.e. two TC21/TC26 and three TC53/TC58).</li> <li>▶ Only compatible with cradles that use ShareCradle design (i.e. TC5X series).</li> <li>▶ Kit includes: <ul style="list-style-type: none"> <li>- Charge+Communication ShareCradle Cup (CRDCUP-NGTC5TC7ETH)</li> <li>- shim for device with boot and shim for device without boot (SHIM-CRD-NGTC5)</li> <li>- screw for attaching cup to cradle</li> </ul> </li> </ul>	
<p>SHIM-CRD-NGTC5</p>		<p>Replacement ShareCradle Cup Inserts/Shims (1 set of shims)</p>	<ul style="list-style-type: none"> <li>▶ Replacement cradle inserts/shims that are typically included with each TC53/TC58 ShareCradle.</li> <li>▶ Includes 1 shim used when device has boot/exoskeleton installed (shim is grey color) and 1 shim for bootless device (shim is black color).</li> <li>▶ Order to replace lost/damaged shims.</li> </ul>	
<b>Battery Charging</b>				
<b>Part Number</b>	<b>Picture</b>	<b>Description</b>	<b>Notes</b>	<b>Required Items</b>
<p>SAC-NGTC5TC7-4SCHG</p>		<p>4-Slot Battery Charger</p>	<ul style="list-style-type: none"> <li>▶ Charges up to four spare Standard capacity or Extended capacity batteries</li> <li>▶ Standard capacity batteries will charge from 0-90% in about 4 hours</li> <li>▶ Can be used standalone or up to 4 Chargers can be mounted on Mounting Bracket (BRKT-SCRD-SMRK-01)</li> </ul> 	<ul style="list-style-type: none"> <li>▶ Power Supply (PWR-BGA12V50W0WW)</li> <li>▶ DC Line Cord (CBL-DC-388A1-01)</li> <li>▶ AC Line Cord (23844-00-00F or country specific version)</li> </ul>

SAC-NGTC5TC7-4SCHG-01		4-Slot Battery Charger Kit	<ul style="list-style-type: none"> <li>▶ Charges up to four spare Standard capacity or Extended capacity batteries</li> <li>▶ Standard capacity batteries will charge from 0-90% in about 4 hours</li> <li>▶ Kit includes: <ul style="list-style-type: none"> <li>- 4-Slot Battery Charger (SAC-NGTC5TC7-4SCHG)</li> <li>- Power Supply (PWR-BGA12V50W0WW)</li> <li>- DC Line Cord (CBL-DC-388A1-01)</li> </ul> </li> <li>▶ Can be used standalone or up to 4 Chargers can be mounted on Mounting Bracket (BRKT-SCRD-SMRK-01)</li> </ul> 	▶ AC Line Cord (23844-00-00F or country specific version)
BTRCUP-NGTC5TC7-01		4-Slot Battery Charger Conversion Kit	<ul style="list-style-type: none"> <li>▶ Typically used to swap out a legacy TC5x series Battery Charger.</li> <li>▶ Converts legacy TC5x 4-Slot Battery Charger or a Multi-Slot ShareCradle with Spare Battery Charger.</li> <li>▶ When installing on the multi-slot base, must be installed in far left cup position.</li> <li>▶ Not compatible with 20-Slot Spare Battery Chargers and does not support more than one Battery Charger to be installed on a multi-slot ShareCradle base.</li> </ul>  <ul style="list-style-type: none"> <li>▶ Installation on Multi-Slot ShareCradle bases manufactured prior to 19-Jul-2019 is not recommended as it may result in inconsistent battery charging.</li> </ul>	




### Direct to Device Charging

Part Number	Picture	Description	Notes	Required Items
CBL-TC5X-USBC2A-01 or CBL-TC2Y-USBC90A-01		USB-A to USB-C cable	<ul style="list-style-type: none"> <li>▶ USB-A to USB-C cable</li> <li>▶ Attaches to USB-C port on bottom of device</li> <li>▶ Cable length is 1M (~3.25 ft.)</li> <li>▶ CBL-TC2Y-USBC90A-01 features USB-A connector with a 90° bend allowing cable to be used in tighter locations. Cable length is about 1.1M (45").</li> </ul>	


### Communication Cables

Part Number	Picture	Description	Notes	Required Items
CBL-TC5X-USBC2A-01 or CBL-TC2Y-USBC90A-01		USB-C cable	<ul style="list-style-type: none"> <li>▶ USB-A to USB-C cable</li> <li>▶ Attaches to USB-C port on bottom of device.</li> <li>▶ Cable length is 1M (~3.25 ft.)</li> <li>▶ CBL-TC2Y-USBC90A-01 features USB-A connector with a 90° bend allowing cable to be used in tighter locations. Cable length is about 1.1M (45").</li> <li>▶ Can be used with USB Cigarette Lighter Adapter (CHG-AUTO-USB1-01) for in-vehicle charging.</li> </ul>	





CBL-TC2X-USBC-01		USB-C cable	<ul style="list-style-type: none"> <li>▶ USB-A to USB-C cable</li> <li>▶ Attaches to USB-C port on bottom of device.</li> <li>▶ Cable length is 1.5M (~5 ft.)</li> <li>▶ This cable includes an additional ferrite bead and is typically used with TC25 devices.</li> </ul>	
3rd party *		USB-C cable	<ul style="list-style-type: none"> <li>▶ Attaches to USB-C port on bottom of device.</li> </ul>	
25-124330-01R		Single Slot Cradle to PC/Host USB cable	<ul style="list-style-type: none"> <li>▶ Used with Single Slot USB/Charging Cradle</li> <li>▶ Micro USB connection on cradle end</li> <li>▶ Cable length is 48 inches</li> </ul>	

**Snap-On Accessories**

Part Number	Picture	Description	Notes	Required Items
TRG-NGTC5-ELEC-01		Trigger Handle	<ul style="list-style-type: none"> <li>▶ Uses electrical trigger via contacts on back side of TC53/TC58.</li> <li>▶ Trigger Handle accessory offers customers the option of using the product in a gun form factor, ideal for scan-intensive situations.</li> <li>▶ Trigger Handle attaches to the mounts on the Rugged Boot (required) and device.</li> <li>▶ Does not block access to rear facing camera and flash allowing camera to be used while using the trigger handle.</li> <li>▶ Compatible with both Standard and Extended capacity batteries.</li> <li>▶ Also compatible with TC53e-RFID units.</li> <li>▶ Optional Wrist Strap (SG-PD40-WLD1-01) also available.</li> </ul>	<ul style="list-style-type: none"> <li>▶ Rugged Boot/Exoskeleton (SG-NGTC5EXO1-01)</li> </ul>
ADP-RFD40-TC5X-2E See RFD40 Accessories Document for additional Info		RFD40 UHF RFID Sled for TC53/TC58	<ul style="list-style-type: none"> <li>▶ Adapter allows TC53/TC58 to be mounted on top of RFD40.</li> <li>▶ Connects to e-Connex port on back of TC53/TC58 for direct wired connection to RFD40.</li> <li>▶ Adapter attaches to top of RFD40 unit.</li> <li>▶ Adapter also allows both the RFD40 and the TC device to be docked as a pair in RFD40 series Single or Multi-Slot ShareCradles. Not compatible with TC53/TC58 cradles shown above in this document - see RFD40 TAG for cradles</li> <li>▶ Compatible with devices using Standard or Extended Capacity batteries.</li> <li>▶ Also compatible with TC53e-RFID units.</li> <li>▶ Compatible with devices with Hand Strap attached.</li> <li>▶ Also compatible with TC53e-RFID units.</li> <li>▶ Rugged Boot/Exoskeleton must be installed on device.</li> </ul>	<ul style="list-style-type: none"> <li>▶ Rugged Boot/Exoskeleton (SG-NGTC5EXO1-01)</li> </ul>

<p>ADP-RFD90-TC5X-2E (e-Connex sled for direct wired connection to RFD90)</p> <p>ADP-RFD90-TC5X-2R (sled for Bluetooth connection to RFD90)</p> <p>See RFD90 Accessories Document for additional Info</p>		<p>RFD90 UHF RFID Sled for TC53/TC58</p>	<ul style="list-style-type: none"> <li>▶ Adapter allows TC53/TC58 to be mounted on top of RFD90.</li> <li>▶ Adapter attaches to top of RFD90 unit.</li> <li>▶ Adapter also allows both the RFD90 and the TC53/TC58 to be docked as a pair in RFD90 series Single or Multi-Slot ShareCradles. Not compatible with TC53/TC58 cradles shown above in this document - see RFD90 TAG for cradles.</li> <li>▶ Compatible with devices using Standard or Extended Capacity batteries.</li> <li>▶ Compatible with devices with Hand Strap attached.</li> <li>▶ Also compatible with TC53e-RFID units.</li> </ul>	<p>▶ Rugged Boot/Exoskeleton (SG-NGTC5EXO1-01)</p>
<p>RAM-GDS-SKIN-ZE34 (3rd party) *</p> <p><a href="https://www.rammount.com">https://www.rammount.com</a></p>		<p>RAM IntelliSkin® Adapter</p>	<ul style="list-style-type: none"> <li>▶ Protective sleeve/boot features a soft, shock-absorbing rubber with additional cutout for the scanner.</li> <li>▶ Converts the device's USB-C connector to RAM's GDS® connector - providing charging and data-sync capabilities across the RAM's GDS® Ecosystem™.</li> <li>▶ Compatible with standard and extended battery packs as well as the hand strap.</li> </ul>	


**Mobile Payment (mPOS)**

Part Number	Picture	Description	Notes	Required Items
<p>PD20 (various SKUs)</p>		<p>PD20 Payment Device</p>	<ul style="list-style-type: none"> <li>▶ Attaches to back of TC53/TC58 allowing the device to accept payment cards.</li> <li>▶ Equipped with NFC, Chip and MSR readers.</li> <li>▶ Certifications include: <ul style="list-style-type: none"> <li>- PCI-PTS 6 SCR and SCRCP</li> <li>- EMV L1</li> <li>- EMV L2 (Contact and Contactless for Visa, Mastercard, American Express, Discover, China UnionPay, and Interac).</li> </ul> </li> </ul>	<p>▶ Battery with Payment Support (BTRY-NGTC5TC7-PYMT)</p>
<p>MISC-PD20-SCREW-01</p>		<p>Replacement Screws for PD20</p>	<ul style="list-style-type: none"> <li>▶ Replacement screws used to secure PD20 into Payment Battery.</li> <li>▶ Includes 100 screws</li> </ul>	

**Soft Goods - Cases/Holsters**




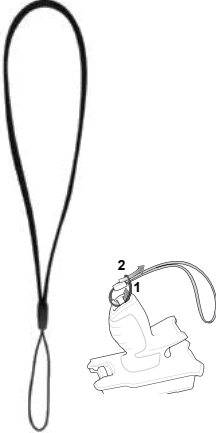
Part Number	Picture	Description	Notes	Required Items
-------------	---------	-------------	-------	----------------

<p>SG-NGTC5TC7-HLSTR-01</p>		<p>Soft Holster</p>	<ul style="list-style-type: none"> <li>▶ Vertical orientation with Open Bucket design to accommodate TC53/TC58, device with optional Rugged Boot/Exoskeleton installed or device with optional Trigger Handle.</li> <li>▶ Strap on rear of holster allows adjustment for use with the accessory options mentioned above.</li> <li>▶ Leather material.</li> <li>▶ Includes Loop for storage of optional stylus.</li> <li>▶ Non rotating for maximum durability.</li> <li>▶ Holster includes cut-out for speaker output.</li> </ul>	
<p>SG-NGTC5EXO1-01</p>		<p>Rugged Boot/Exoskeleton</p>	<ul style="list-style-type: none"> <li>▶ Boot increases drop spec of device to 6 ft. to concrete.</li> <li>▶ Two piece design provides for an easier installation and snaps together to form boot.</li> <li>▶ Required to be used with Trigger Handle and RFID sleds.</li> </ul>	
<p>SG-NGTC5EXOBLU1-01 (single)</p> <p>SG-NGTC5EXO1-120 (case of 120)</p>		<p>Rugged Boot/Exoskeleton - Blue color</p>	<ul style="list-style-type: none"> <li>▶ Boot increases drop spec of device to 6 ft. to concrete.</li> <li>▶ Two piece design provides for an easier installation and snaps together to form boot.</li> <li>▶ Required to be used with Trigger Handle and RFID sleds.</li> <li>▶ Blue color - PMS color code 281 C</li> <li>▶ <b>NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</b></li> </ul>	




<p>SG-NGTC5EXOYLW-01 (single)</p>		<p>Rugged Boot/Exoskeleton - Yellow color</p>	<ul style="list-style-type: none"> <li>▶ Boot increases drop spec of device to 6 ft. to concrete.</li> <li>▶ Two piece design provides for an easier installation and snaps together to form boot.</li> <li>▶ Required to be used with Trigger Handle and RFID sleds.</li> <li>▶ Yellow color - PMS color code 115 U</li> <li>▶ <b>NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</b></li> </ul>	
<p>SG-NGTC5EXORED1-01 (single)</p>		<p>Rugged Boot/Exoskeleton - Red color</p>	<ul style="list-style-type: none"> <li>▶ Boot increases drop spec of device to 6 ft. to concrete.</li> <li>▶ Two piece design provides for an easier installation and snaps together to form boot.</li> <li>▶ Required to be used with Trigger Handle and RFID sleds.</li> <li>▶ Red color - PMS color code 485 C</li> <li>▶ <b>NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</b></li> </ul>	
<p>varies</p>		<p>Additional Rugged Boot/Exoskeleton options</p>	<ul style="list-style-type: none"> <li>▶ Zebra can create a custom colored Rugged Boot to match your application or corporate color scheme.</li> <li>▶ Have your Zebra representative submit a Custom Product Request.</li> </ul>	
<p>SG-NGTC5-WMADP1-01</p>		<p>Arm/Wrist Mount (Standard length Strap)</p>	<ul style="list-style-type: none"> <li>▶ Allows device to be worn as a wearable device.</li> <li>▶ Wearable design allows the user to have easy access to the device while having the ability to use both hands.</li> <li>▶ Swivel design allows device to be viewed in Portrait or Landscape mode.</li> <li>▶ Use of a Bluetooth Ring Scanner like the RS5100 is recommended. Allows for occasional use of device's built-in scanner while in mount.</li> <li>▶ Also provides access to device's USB-C port for use with RS5100/RS6100 Corded Scanner adapter cable.</li> <li>▶ Uses BOA dial-to-fit design which is strong, durable, and easy to use.</li> <li>▶ Velcro free design uses non-absorbent materials that can be wiped down.</li> <li>▶ Includes Carrier, Comfort Pad (SG-NGWT-CMPD-01) and Small/Medium size Wrist Strap (SG-NGWT-WSTPST-01).</li> <li>▶ White Dial and accent color on strap identify size as Standard (small-medium).</li> <li>▶ Strap length can be adjusted between 128 to 191 mm (approx 5.0 to 7.5")</li> <li>▶ It is typical for each user to have their own wrist mount (for hygiene).</li> <li>▶ Same design and materials as WT6000 series wrist mounts.</li> <li>▶ Must be used with Rugged Boot/Exoskeleton installed on device.</li> <li>▶ Compatible with Standard and Extended Capacity Battery</li> </ul>	<p>▶ Rugged Boot/Exoskeleton (SG-NGTC5EXO1-01)</p>

<p>SG-NGTC5-WMADP1-02</p>		<p>Arm/Wrist Mount (Extended length Strap)</p>	<ul style="list-style-type: none"> <li>▶ Allows device to be worn as a wearable device.</li> <li>▶ Wearable design allows the user to have easy access to the device while having the ability to use both hands.</li> <li>▶ Swivel design allows device to be viewed in Portrait or Landscape mode.</li> <li>▶ Use of a Bluetooth Ring Scanner like the RS5100 is recommended. Allows for occasional use of device's built-in scanner while in mount.</li> <li>▶ Also provides access to device's USB-C port for use with RS5100/RS6100 Corded Scanner adapter cable.</li> <li>▶ Uses BOA dial-to-fit design which is strong, durable, and easy to use.</li> <li>▶ Velcro free design uses non-absorbent materials that can be wiped down.</li> <li>▶ Includes Carrier, Comfort Pad (SG-NGWT-CMPD-01) and Medium/Large size Wrist Strap (SG-NGWT-WSTPLN-01).</li> <li>▶ Black Dial and accent color on strap identify size as Extended (medium-large).</li> <li>▶ Strap length can be adjusted between 164 to 265 mm (approx 6.5 to 10.5")</li> <li>▶ It is typical for each user to have their own wrist mount (for hygiene).</li> <li>▶ Same design and materials as WT6000 series wrist mounts.</li> <li>▶ Must be used with Rugged Boot/Exoskeleton installed on device.</li> <li>▶ Compatible with Standard and Extended Capacity Battery</li> </ul>	<p>▶ Rugged Boot/Exoskeleton (SG-NGTC5EXO1-01)</p>
<p>SG-NGWT-CMPD-02</p>		<p>Replacement Comfort Pad for wrist mount</p>	<ul style="list-style-type: none"> <li>▶ Soft Rubber</li> <li>▶ Easily removable</li> <li>▶ Hygienic</li> <li>▶ Improved design vs. SG-NGWT-CMPD-01 which now includes ridges in the top surface that assists with alignment during installation and reduces the occurrence of slippage, especially in the presence of sweat.</li> </ul>	
<p>SG-NGWT-CMPD-01</p>		<p>Replacement Comfort Pad for wrist mount</p>	<ul style="list-style-type: none"> <li>▶ Soft Rubber</li> <li>▶ Easily removable</li> <li>▶ Hygienic</li> </ul>	
<p>SG-NGWT-WSTPST-01</p>		<p>Replacement Arm/Wrist Strap (standard size)</p>	<ul style="list-style-type: none"> <li>▶ White Dial and accent color on strap identify size as Standard (small/medium)</li> <li>▶ Strap length can be adjusted between 128 to 191 mm (approx 5.0 to 7.5")</li> </ul>	




<p>SG-NGWT-WSTPLN-01</p>		<p>Replacement Arm/Wrist Strap (extended size)</p>	<ul style="list-style-type: none"> <li>▶ Black Dial and accent color on strap identify size as Extended (medium/large)</li> <li>▶ Strap length can be adjusted between 164 to 265 mm (approx 6.5 to 10.5")</li> </ul>	
<p>SG-NGWT-WSTPXL-01</p>		<p>Replacement Wrist Strap (extra-large size)</p>	<ul style="list-style-type: none"> <li>▶ Blue Dial and accent color on strap identify size as extra-large.</li> <li>▶ Strap length can be adjusted between 218 to 375 mm (approx 8.5 to 14.75")</li> </ul>	
<p>InfoCase (3rd party) *</p> <p>(various SKUs)</p> <p>contacts: commercial@infocase.com</p> <p><a href="https://www.infocase.com">https://www.infocase.com</a></p>		<p>InfoCase Arm Mount</p>	<ul style="list-style-type: none"> <li>▶ Allows TC53/TC58 to be worn as a wearable device.</li> <li>▶ Allows Portrait or landscape orientation use.</li> </ul>	
<p>SG-WT4027050-01R</p>		<p>Arm Sleeve (pack of 5)</p>	<ul style="list-style-type: none"> <li>▶ Worn under wrist mount strap if worker is in short-sleeved shirt and wants: <ul style="list-style-type: none"> <li>- Extra sweat wicking/ personal layer</li> <li>- Extra comfort</li> <li>- Extra slip-resistance</li> </ul> </li> <li>▶ Material will not snag</li> <li>▶ One size fits all</li> <li>▶ Washable in mild detergent. Should be air dried.</li> <li>▶ Pack of 5 Arm Sleeves</li> </ul>	


<p>SG-NGTC5TC7-HDSTP-01 (single strap)</p> <p>SG-NGTC5TC7-HDSTP-03 (pack of 3)</p> <p>SG-NGTC5TC7-HDSTP-1K (case of 1000)</p> <p>NOTE: 1000 count case is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item.</p>		<p>Hand Strap</p>	<ul style="list-style-type: none"> <li>▶ Allows device to be easily held in palm of hand.</li> <li>▶ Can be attached to device two ways:             <ol style="list-style-type: none"> <li>1. Attaches directly to TC53/TC58 device.</li> <li>2. Attaches to Rugged Boot/ Exoskeleton</li> </ol> </li> <li>▶ Includes loop for holding optional stylus.</li> </ul>	
<p>AK4316DW (3rd party) *</p> <p><a href="http://www.ultimacase.com">http://www.ultimacase.com</a></p>		<p>Ultima Case Arm/Wrist Mount Holster</p> 	<ul style="list-style-type: none"> <li>▶ Allows TC53/TC58 to be worn as a wearable device.</li> <li>▶ OP Case shipped fully assembled.</li> <li>▶ Leather-like exterior is rich in appearance and cleans easily.</li> <li>▶ DirectTouch Op Case allows input with a tactile feel on the screen.</li> <li>▶ Portrait to landscape orientation of the device by custom swivel ratchet (no velcro).</li> <li>▶ Not compatible with devices with Rugged Boot/Exoskeleton attached.</li> </ul>	
<p>AK4314DW (for devices without Boot)</p> <p>AK4315DW (for devices with Boot)</p> <p>(3rd party) *</p> <p><a href="http://www.ultimacase.com">http://www.ultimacase.com</a></p>		<p>Ultima Case Operations Case</p> 	<ul style="list-style-type: none"> <li>▶ Snap closure for easy removal of device.</li> <li>▶ Includes D-rings for use with an optional retractor or shoulder strap.</li> <li>▶ Direct access to screen for ease of use.</li> <li>▶ Includes hand strap</li> </ul>	
<p>SG-PD40-WLD1-01</p>		<p>Wrist Strap for Trigger Handle</p>	<ul style="list-style-type: none"> <li>▶ Attaches to bottom of Trigger Handle (TRG-NGTC5-ELEC-01)</li> </ul>	


**Vehicle Cradles and Holders**

Powered Cradles and Holders (provides device charging and/or communication)				
Part Number	Picture	Description	Notes	Required Items
CRD-TC58-WCVC-01		Charge-Only Vehicle Cradle - Wireless Charging	<ul style="list-style-type: none"> <li>▶ Device inserts bottom first and is retained by top latch.</li> <li>▶ Uses four mounting screws with AMPSS hole pattern.</li> <li>▶ Includes stylus holder (stylus not included) which can be mounted on left or right side of cradle or can be removed if not needed. Optional Stylus (SG-STYLUS-TCX-MTL-03) will fit into holder.</li> <li>▶ Only works with devices with Rugged Boot attached.</li> <li>▶ Does not support Trigger Handle.</li> <li>▶ Only compatible with TC58 Premium configs which include wireless charging circuitry. TC53 and TC58 Standard configs do not include wireless charging circuitry.</li> </ul>	<ul style="list-style-type: none"> <li>▶ Rugged Boot/Exoskeleton (SG-NGTC5EXO1-01)</li> <li>▶ Wireless Charging Battery (BTRY-NGTC5TC7-44MAWC-01)</li> <li>▶ <b>For Charging:</b> Cigarette Lighter Auto Charge Cable (CHG-AUTO-CLA1-01) OR Hard Wired Auto Charge Cable (CHG-AUTO-HWIRE1-01) OR Vehicle Charger Cable for USB I/O Hub and ZQ500/ZQ600 Series Printers (VAM-MPP-VHCH1-01) OR Legacy Zebra Vehicle Cradle Adapter Cable (CBL-TC7X-GFS-01) OR Lind (Gamber-Johnson) Isolated Power Supply when installed on higher voltage vehicles</li> <li>▶ <b>For Mounting:</b> Windshield Suction Mount (RAM-B-166U) OR See other RAM or ProClip mounting bracket options in the <b>Common Mounting Systems Technical Accessory Guide</b></li> </ul>
3PTY-PCLIP-712306		ProClip Charge-Only Vehicle Cradle (Drop-in Style) with Cigarette Lighter Adapter	<ul style="list-style-type: none"> <li>▶ This is a light duty, quick and easy, one handed, top drop in style cradle.</li> <li>▶ Cradle can be used in vertical (portrait) position or landscape mode.</li> <li>▶ Cigarette Lighter Adapter (CLA) cable is included. No other power cables needed.</li> <li>▶ Uses four mounting screws with AMPSS hole pattern.</li> <li>▶ Only works with devices with Rugged Boot attached.</li> <li>▶ 12-24V input, 5V output</li> <li>▶ Connects to charge contacts on bottom of device.</li> <li>▶ Compatible with devices using Standard or Extended Capacity batteries.</li> <li>▶ Does not support Trigger Handle.</li> </ul>	<ul style="list-style-type: none"> <li>▶ Rugged Boot/Exoskeleton (SG-NGTC5EXO1-01)</li> <li>▶ <b>For Mounting:</b> Windshield Suction Mount (RAM-B-166U) OR See other RAM or ProClip mounting bracket options in the <b>Common Mounting Systems Technical Accessory Guide</b> (TAG).</li> </ul>
3PTY-PCLIP-216475		ProClip Charge+Communication Vehicle Cradle (Drop-in Style) with USB-C Cable	<ul style="list-style-type: none"> <li>▶ This is a light duty, quick and easy, one handed, top drop in style cradle.</li> <li>▶ Cradle can be used in vertical (portrait) position or landscape mode.</li> <li>▶ Uses four mounting screws with AMPSS hole pattern.</li> <li>▶ Only works with devices with Rugged Boot attached.</li> <li>▶ Includes USB-C cable (4 ft. length) for providing power and USB communications.</li> <li>▶ Connects to USB-C port on device.</li> <li>▶ Compatible with devices using Standard or Extended Capacity batteries.</li> <li>▶ Does not support Trigger Handle.</li> </ul>	<ul style="list-style-type: none"> <li>▶ Rugged Boot/Exoskeleton (SG-NGTC5EXO1-01)</li> <li>▶ USB Power supply (i.e. cigarette lighter adapter, wall outlet or similar)</li> <li>▶ <b>For Mounting:</b> Windshield Suction Mount (RAM-B-166U) OR See other RAM or ProClip mounting bracket options in the <b>Common Mounting Systems Technical Accessory Guide</b> (TAG).</li> </ul>





<p>3PTY-PCLIP-241872</p> <p>NOTE: Products sold that do not bear the Zebra brand name are serviced and supported exclusively by their manufacturers in accordance with terms and conditions packaged with the products. Zebra's Limited Warranty does not apply to products that are not Zebra branded, even if packaged or sold with Zebra products. Please contact the manufacturer directly for technical support and customer service. See PMB 11136 for more info.</p>		<p>ProClip Charge-Only Vehicle Cradle (Drop-in Style) with USB-A Cable</p>	<ul style="list-style-type: none"> <li>▶ This is a light duty, quick and easy, one handed, top drop in style cradle.</li> <li>▶ Cradle can be used in vertical (portrait) position or landscape mode.</li> <li>▶ Uses four mounting screws with AMPS hole pattern.</li> <li>▶ Only works with devices with Rugged Boot attached.</li> <li>▶ Includes USB-A cable (4 ft. length) for providing power - does not support USB communications.</li> <li>▶ Connects to charge contacts on bottom of device.</li> <li>▶ Compatible with devices using Standard or Extended Capacity batteries.</li> <li>▶ Does not support Trigger Handle.</li> </ul>	<ul style="list-style-type: none"> <li>▶ Rugged Boot/Exoskeleton (SG-NGTC5EXO1-01)</li> <li>▶ USB Power supply (i.e. cigarette lighter adapter, wall outlet or similar)</li> <li>▶ <b>For Mounting:</b> Windshield Suction Mount (RAM-B-166U) OR See other RAM or ProClip mounting bracket options in the <b>Common Mounting Systems</b> Technical Accessory Guide (TAG).</li> </ul>
<p>3PTY-PCLIP-713306</p> <p>NOTE: Products sold that do not bear the Zebra brand name are serviced and supported exclusively by their manufacturers in accordance with terms and conditions packaged with the products. Zebra's Limited Warranty does not apply to products that are not Zebra branded, even if packaged or sold with Zebra products. Please contact the manufacturer directly for technical support and customer service. See PMB 11136 for more info.</p>		<p>ProClip Charge-Only Vehicle Cradle (Drop-in Style) with Hard Wired Power Adapter</p>	<ul style="list-style-type: none"> <li>▶ This is a light duty, quick and easy, one handed, top drop in style cradle.</li> <li>▶ Cradle can be used in vertical (portrait) position or landscape mode.</li> <li>▶ Uses four mounting screws with AMPS hole pattern.</li> <li>▶ Only works with devices with Rugged Boot attached.</li> <li>▶ Power supply converts from 12/24V to 5.4V - 2.7A output</li> <li>▶ Connects to charge contacts on bottom of device.</li> <li>▶ Compatible with devices using Standard or Extended Capacity batteries.</li> <li>▶ Does not support Trigger Handle.</li> </ul>	<ul style="list-style-type: none"> <li>▶ Rugged Boot/Exoskeleton (SG-NGTC5EXO1-01)</li> <li>▶ <b>For Mounting:</b> Windshield Suction Mount (RAM-B-166U) OR See other RAM or ProClip mounting bracket options in the <b>Common Mounting Systems</b> Technical Accessory Guide (TAG).</li> </ul>
<p>various SKUs (3rd party) *</p> <p><a href="http://www.proclipusa.com/category/zebra">http://www.proclipusa.com/category/zebra</a></p>		<p>ProClip Vehicle Cradles</p>	<ul style="list-style-type: none"> <li>▶ Available in both non-powered, hard wired and cigarette lighter adapter cable configurations.</li> <li>▶ Versions available for devices with and without Rugged Boot installed.</li> <li>▶ Durable cradle design for rugged enterprise use.</li> <li>▶ Cradle provided 15 degree angle in any direction.</li> <li>▶ Allows for portrait and landscape view.</li> <li>▶ AMPS hole pattern for simple wall, pedestal or vehicle dashboard mounting.</li> </ul>	

<p>3PTY-RAM-HOL-ZE17-2U</p> <p>NOTE: Products sold that do not bear the Zebra brand name are serviced and supported exclusively by their manufacturers in accordance with terms and conditions packaged with the products. Zebra's Limited Warranty does not apply to products that are not Zebra branded, even if packaged or sold with Zebra products. Please contact the manufacturer directly for technical support and customer service. See PMB 11136 for more info.</p>		<p>RAM Charge-Only Non-Locking Vehicle Cradle</p>	<ul style="list-style-type: none"> <li>▶ Spring-loaded cradle allows easy one handed insertion and removal.</li> <li>▶ Compatible with RAM two-hole AMPS pattern diamond bases that will connect to B and C size ball mounts, allowing for a wide variety of mounting options.</li> <li>▶ Included shims allows cradle to be compatible with devices with and without Rugged Boot/Exoskeleton attached. Also compatible with devices with handstrap attached.</li> <li>▶ Includes stylus holder (stylus not included) which is fixed mounted on left side of cradle. Optional Stylus (SG-STYLUS-TCX-MTL-03) will fit into holder.</li> <li>▶ Uses RAM Mount RAM-HOL-ZE17-2U</li> </ul>	<p><b>For Charging:</b> RAM GDS Modular Charger, see In-Vehicle Power Supplies section below</p> <p><b>For Mounting:</b> Windshield Suction Mount (RAM-B-166U) OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware - See mounting bracket options in the <b>Common Mounting Systems</b> Technical Accessory Guide (TAG).</p>
<p>3PTY-RAM-HOL-ZE17L-2U </p> <p>NOTE: Products sold that do not bear the Zebra brand name are serviced and supported exclusively by their manufacturers in accordance with terms and conditions packaged with the products. Zebra's Limited Warranty does not apply to products that are not Zebra branded, even if packaged or sold with Zebra products. Please contact the manufacturer directly for technical support and customer service. See PMB 11136 for more info.</p>		<p>RAM Charge-Only Locking Vehicle Cradle</p>	<ul style="list-style-type: none"> <li>▶ Spring-loaded cradle allows easy one handed insertion and removal.</li> <li>▶ Includes lock.</li> <li>▶ Compatible with RAM two-hole AMPS pattern diamond bases that will connect to B and C size ball mounts, allowing for a wide variety of mounting options.</li> <li>▶ Included shims allows cradle to be compatible with devices with and without Rugged Boot/Exoskeleton attached. Also compatible with devices with handstrap attached.</li> <li>▶ Includes stylus holder (stylus not included) which is fixed mounted on left side of cradle. Optional Stylus (SG-STYLUS-TCX-MTL-03) will fit into holder.</li> <li>▶ Uses RAM Mount RAM-HOL-ZE17L-2U</li> </ul>	<p><b>For Charging:</b> RAM GDS Modular Charger, see In-Vehicle Power Supplies section below</p> <p><b>For Mounting:</b> Windshield Suction Mount (RAM-B-166U) OR Vehicle Cradle RAM mount ball (RAM-B-238U) and additional RAM mount hardware - see mounting bracket options in the <b>Common Mounting Systems</b> Technical Accessory Guide (TAG).</p>
<p>various SKUs (3rd party) *</p> <p><a href="https://www.rammount.com">https://www.rammount.com</a></p>		<p>RAM Charge-Only Vehicle Cradle</p>	<ul style="list-style-type: none"> <li>▶ Spring-loaded cradle allows easy one handed insertion and removal.</li> <li>▶ Compatible with RAM two-hole AMPS pattern diamond bases that will connect to B and C size ball mounts, allowing for a wide variety of mounting options.</li> <li>▶ Included shims allows cradle to be compatible with devices with and without Rugged Boot/Exoskeleton attached. Also compatible with devices with handstrap attached.</li> <li>▶ Includes stylus holder (stylus not included) which is fixed mounted on left side of cradle. Optional Stylus (SG-STYLUS-TCX-MTL-03) will fit into holder.</li> </ul>	<p><b>For Charging</b> RAM GDS Modular Charger, see In-Vehicle Power Supplies section below</p> <p><b>For Mounting</b> ▶ Windshield Suction Mount (RAM-B-166U) OR ▶ see RAM website for other options</p>

<p>various SKUs (3rd party) *</p> <p><a href="https://www.rammount.com">https://www.rammount.com</a></p>		<p>RAM Vehicle Cradles with GDS® Technology™</p>	<ul style="list-style-type: none"> <li>▶ Spring-loaded cradle allows easy one handed insertion and removal.</li> <li>▶ Compatible with RAM two-hole AMPS pattern diamond bases that will connect to B and C size ball mounts, allowing for a wide variety of mounting options.</li> <li>▶ Compatible when using optional handstrap.</li> <li>▶ Uses RAM GDS® Technology™ allowing cradle compatibility with various Zebra devices.</li> <li>▶ Versions available with/without lock, with/without external USB port and with/without heated POGO pins.</li> <li>▶ Cradle is powered via USB-C port</li> </ul>	<ul style="list-style-type: none"> <li>▶ RAM IntelliSkin® Adapter (RAM-GDS-SKIN-ZE34)</li> <li>▶ see RAM website for compatible USB-C vehicle power options</li> </ul>
--	---	--	--	--


**Un-Powered Cradles and Holders (passive holders, no charging support)**

Part Number	Picture	Description	Notes	Required Items
<p>CRD-TC5NG-NCCD-01</p>		<p>Vehicle Holder</p>	<ul style="list-style-type: none"> <li>▶ Holds device in vehicle installations.</li> <li>▶ Spring tension on holder.</li> <li>▶ Provides access to USB-C port on bottom of device allowing device to be charged.</li> <li>▶ Only works with devices with Rugged Boot attached.</li> <li>▶ Does not support Trigger Handle.</li> </ul>	<ul style="list-style-type: none"> <li>▶ Rugged Boot/Exoskeleton (SG NGTC5EXO1-01)</li> <li>▶ <b>For Mounting:</b> Windshield Suction Mount (RAM-B-166U) OR See other RAM or ProClip mounting bracket options in the <b>Common Mounting Systems</b> Technical Accessory Guide (TAG).</li> </ul>
<p>various SKUs (3rd party) *</p> <p><a href="http://www.proclipusa.com/category/zebra">http://www.proclipusa.com/category/zebra</a></p>		<p>ProClip Vehicle Holders</p>	<ul style="list-style-type: none"> <li>▶ Versions available for devices with and without Rugged Boot installed.</li> <li>▶ Durable cradle design for rugged enterprise use.</li> <li>▶ Cradles provided 15 degree angle in any direction.</li> <li>▶ Allows for portrait and landscape view.</li> <li>▶ AMPS hole pattern for simple wall, pedestal or vehicle dashboard mounting.</li> </ul>	



<p>RAM-HOL-ZE17-NP-2U (non-locking version)</p> <p>RAM-HOL-ZE17L-NP-2U (locking version)</p> <p>(3rd party) *</p> <p><a href="https://www.rammount.com">https://www.rammount.com</a></p>		<p>RAM Vehicle Holder</p> 	<ul style="list-style-type: none"> <li>▶ Spring-loaded cradle allows easy one handed insertion and removal.</li> <li>▶ Compatible with RAM two-hole AMPS pattern diamond bases that will connect to B and C size ball mounts, allowing for a wide variety of mounting options.</li> <li>▶ Included shims allows cradle to be compatible with devices with and without Rugged Boot/Exoskeleton attached. Also compatible with devices with handstrap attached.</li> <li>▶ Includes stylus holder (stylus not included) which is fixed mounted on left side of cradle. Optional Stylus (SG-STYLUS-TCX-MTL-03) will fit into holder.</li> </ul>	<p><b>For Mounting</b></p> <ul style="list-style-type: none"> <li>▶ Windshield Suction Mount (RAM-B-166U)</li> <li>OR</li> <li>▶ see RAM website for other options</li> </ul>
--	---	---	--	---



**Vehicle Mounting Hardware**

Refer to the Common Mounting Systems Technical Accessory Guide (TAG) for mounting options







**Misc**

Part Number	Picture	Description	Notes	Required Items
<p>SG-STYLUS-TCX-MTL-03 (pack of 3)</p>		<p>Fiber Tipped Stylus</p>	<ul style="list-style-type: none"> <li>▶ Black Passive Stylus with Zebra logo</li> <li>▶ 5" length</li> <li>▶ Heavy duty - made from stainless steel and brass. No plastic parts - real pen feel.</li> <li>▶ Can be used in rain.</li> <li>▶ Micro-Knit Hybrid Mesh Fiber Tip provides silent, smooth gliding use.</li> <li>▶ Big improvement over rubber tipped or plastic tipped stylus.</li> <li>▶ Compatible with all capacitive touch screen devices.</li> <li>▶ Can be tethered to device using SG-TC5NGTC7NG-TETHR-03.</li> </ul>	
<p>SG-TC5NGTC7NG-TETHR-03 (pack of 3)</p>		<p>Tether for Stylus</p>	<ul style="list-style-type: none"> <li>▶ String type tether prevents loss of stylus</li> <li>▶ NOTE: Other Zebra coiled tethers are not recommended for use with TC53/TC58 as they may interfere with other accessories.</li> <li>▶ NOTE: This tether is recommended when using Fiber Tipped Stylus (SG-STYLUS-TCX-MTL-03). Other tethers may not fit easily through the tether loop hole on the stylus.</li> </ul>	




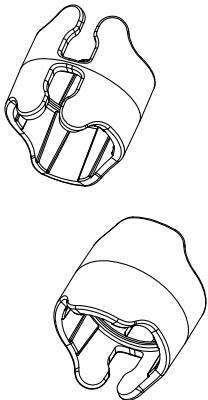
SG-NGTC5-SCRNP-01 (single)  SG-NGTC5-SCRNP-03 (pack of 3)  SG-NGTC5-SCRNP-450 (carton of 450)		Screen Protectors	<ul style="list-style-type: none"> <li>▶ Tempered glass</li> <li>▶ Includes alcohol wipes, cleaning cloth and tools needed for screen protector installation.</li> </ul>	
InfoCase (3rd party) *  (various SKUs)  contacts: commercial@infocase.com  <a href="https://www.infocase.com">https://www.infocase.com</a>		InfoCase Screen Protectors	<ul style="list-style-type: none"> <li>▶ 9H hardness protects the display glass from scratching.</li> <li>▶ Multi-layer construction provides high impact resistance.</li> <li>▶ High light transmittance and superior optical clarity makes the protector nearly unnoticeable.</li> <li>▶ Quick and easy, bubble-free installation.</li> <li>▶ Oleophobic coating is resistant to smudge and fingerprint.</li> <li>▶ Touch and stylus compatible.</li> </ul>	

## Headset/Audio Accessories

**Wired Headsets and Audio Accessories**  
 NOTE: Wired headsets with 2.5mm or 3.5mm jacks are not supported on TC53e, TC58 or TC58e devices since they do not include a headset jack.  
 Only TC53 units include a headset jack.



Part Number	Picture	Description	Notes	Required Items
HDST-USBC-PTT1-01		PTT Headset (USB-C connector) 	<ul style="list-style-type: none"> <li>▶ For Push-To-Talk (PTT) applications.</li> <li>▶ Compatible with Zebra PTT Express and PTT Pro.</li> <li>▶ Connects to USB-C port on device.</li> <li>▶ Rotating earpiece allows for right or left ear configuration.</li> <li>▶ Provides PTT button, volume up/volume down buttons.</li> <li>▶ Cable length is 32 in. (81 cm)</li> <li>▶ mono with microphone</li> <li>▶ includes clip for attaching PTT button to clothing.</li> </ul>	
HDST-35MM-PTT1-02		PTT and VoIP Headset (3.5mm Standard jack)	<ul style="list-style-type: none"> <li>▶ For Push-To-Talk (PTT) and VoIP telephony.</li> <li>▶ Compatible with Zebra PTT Express and PTT Pro.</li> <li>▶ Uses standard 3.5mm jack.</li> <li>▶ Rotating earpiece allows for right or left ear configuration</li> <li>▶ Built-in cord wrap</li> <li>▶ mono with microphone</li> <li>▶ includes clip for attaching PTT button to clothing.</li> <li>▶ Improved resistance to cleaning and sanitizing products vs. HDST-35MM-PTT1-01</li> </ul>	
3PTY-NO-EHL1W-01		PTT and VoIP Headset, over the ear (3.5mm Standard jack)	<ul style="list-style-type: none"> <li>▶ For Push-To-Talk (PTT) and VoIP telephony.</li> <li>▶ Compatible with Zebra PTT Express and PTT Pro.</li> <li>▶ Uses standard 3.5mm jack.</li> <li>▶ Speaker fits over the ear vs. HDST-35MM-PTT1-02</li> <li>▶ Rotating earpiece allows for right or left ear configuration</li> <li>▶ mono with microphone</li> <li>▶ includes clip for attaching PTT button to clothing.</li> </ul>	

<p>HDST-35MM-PTVP-02</p>		<p>PTT Headset (3.5mm Locking jack)</p>	<ul style="list-style-type: none"> <li>▶ For Push-To-Talk (PTT) and VoIP telephony.</li> <li>▶ Compatible with Zebra PTT Express and PTT Pro.</li> <li>▶ Uses 3.5mm rugged jack that is keyed/collared for a locking failsafe connection.</li> <li>▶ Rotating earpiece allows for right or left ear configuration</li> <li>▶ Built-in cord wrap</li> <li>▶ mono with microphone</li> <li>▶ includes clip for attaching PTT button to clothing.</li> <li>▶ Improved resistance to cleaning and sanitizing products vs. HDST-35MM-PTVP-01</li> </ul>	<ul style="list-style-type: none"> <li>▶ 3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01)</li> </ul>
<p>SL+1W-3.5WA (3rd party) *</p> <p><a href="https://workforceaudio.com">https://workforceaudio.com</a></p>		<p>Workforce Audio SnapLock PTT Adapter Cable</p>	<ul style="list-style-type: none"> <li>▶ For Push-To-Talk (PTT) applications.</li> <li>▶ Compatible with Zebra PTT Express and PTT Pro.</li> <li>▶ 3.5 mm jack</li> <li>▶ Adapter cable provide SnapLock connector which accepts a variety of Workforce Audio's earpieces.</li> <li>▶ includes clip for attaching PTT button to clothing</li> </ul>	<p>Requires purchase of earpiece for connecting to cable.</p>
<p>See HS2100-HS3100 Accessories Document</p>		<p>HS2100 Rugged Wired Headset</p>	<ul style="list-style-type: none"> <li>▶ Built to handle the everyday inevitable drops</li> <li>▶ Dustproof, sprayproof and waterproof</li> <li>▶ Ready for the freezer and outdoor subzero temperatures</li> <li>▶ Feather-light for extraordinary comfort</li> <li>▶ Noise cancellation for a superior voice experience in the noisiest environments</li> <li>▶ Detachable swivel boom minimizes costs.</li> <li>▶ Swivelling boom mutes microphone allowing users to prevent voice pick applications from recognizing non-voice pick conversations.</li> <li>▶ User-replaceable pads and windscreens maximize comfort and hygiene</li> </ul>	<ul style="list-style-type: none"> <li>▶ 3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01)</li> <li>▶ HS2100 to 3.5mm Standard Cable (CBL-HS2100-3MS1-01)</li> </ul> <p>See HS2100/HS3100 Accessories Document for additional headset accessories</p>

<p>VR12 (3rd party) *</p> <p><a href="http://www.blueparrott.com">http://www.blueparrott.com</a></p>		<p>BlueParrott VR12 Wired Noise Cancelling Headset</p>	<ul style="list-style-type: none"> <li>▶ Audio accuracy for voice picking and other speech recognition applications.</li> <li>▶ High quality durability stands up to all-day, every-day use.</li> <li>▶ Lightweight design is easy and comfortable to wear all day.</li> <li>▶ Compatible with most major wearable computers and devices used in voice-picking environments.</li> <li>▶ G type (GN Netcom) Quick Disconnect.</li> <li>▶ Convertible design gives choice of over-the-head and behind-the-neck wearing styles</li> </ul>	<p><b>For 3.5mm locking jack (recommended):</b> 3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01) AND RCH50/RCH51 Quick Disconnect Headset Adapter Cable (ADP-35M-QDCBL1-01)</p>
<p>CBL-HS2100-3MS1-01</p>		<p>HS2100 Headset Standard Cable (3.5 mm jack)</p>	<ul style="list-style-type: none"> <li>▶ 3.5mm barrel jack connector</li> <li>▶ For use with TC5X, TC7X, TC8000, or other devices using a 3.5mm barrel jack audio connector</li> <li>▶ Cable is 43" (1.1 M) long</li> <li>▶ Rugged cable with rugged connectors that are keyed/collared for a locking failsafe connection.</li> <li>▶ Includes one clothing clip. Additional clips can be purchased separately.</li> </ul>	<p>3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (CBL-TC51-HDST35-01)</p>
<p>CBL-TC51-HDST35-01</p>		<p>3.5mm Keyed/Collared Female to 3.5mm Male Headset Adapter Cable (3.5mm jack)</p>	<ul style="list-style-type: none"> <li>▶ Provides a collared/keyed 3.5mm barrel jack connector.</li> <li>▶ Required for use with some headsets (i.e. HS2100) that use a locking keyed connector on the headset jack.</li> <li>▶ Cable is approximately 6 inches long</li> <li>▶ Includes Retention/Anti-Rotation Lock (ADP-LOCK-3.5HT1-01)</li> </ul>	
<p>ADP-LOCK-3.5HT1-01</p>		<p>Spare/Replacement 3.5mm Audio Adapter Retention and Anti-Rotation Lock</p>	<ul style="list-style-type: none"> <li>▶ This clip is used with the Keyed/Collared Female to Male Headset Adapter Cable (CBL-TC51-HDST35-01) and keyed headset cables to prevent cable rotation/spinning and also to provide a secure, reliable headset connection.</li> <li>▶ Clip is normally included with the Keyed/Collared Female to Male Headset Adapter Cable, this is a spare/replacement clip/lock.</li> <li>▶ <b>NOTE: This is a Spare/Service Parts item. Order by contacting Zebra Support Center - see SMB 6233 for details.</b></li> </ul>	
<p><b>Bluetooth Headsets and Audio Accessories</b> NOTE: Bluetooth headsets with PTT function not supported by Zebra PTT Express application. Check Zebra WFC Central Client app Release Notes to verify compatibility.</p>				
Part Number	Picture	Description	Notes	Required Items



<p>See HS2100-HS3100 Accessories Document</p>		<p>HS3100 Rugged Bluetooth Headset for VDP applications</p>	<ul style="list-style-type: none"> <li>▶ HD Voice, also known as Wide Band Audio, brings incredible audio clarity</li> <li>▶ Built to handle the everyday inevitable drops</li> <li>▶ Dustproof, sprayproof and waterproof</li> <li>▶ Ready for the freezer and outdoor subzero temperatures</li> <li>▶ Feather-light for extraordinary comfort</li> <li>▶ Noise cancellation tuned for VDP (voice directed picking) applications.</li> <li>▶ Not designed for the aggressive noise cancellation required for VoIP or voice calls. Headset's send level is not tuned to satisfy VoIP or voice standards and will result with audio being quieter at the far end and delivering more noise.</li> <li>▶ Swap batteries on the fly – without losing the Bluetooth connection</li> <li>▶ Split-second tap-to-pair simplicity using NFC.</li> <li>▶ Detachable swivel boom minimizes costs.</li> <li>▶ Swivelling boom mutes microphone allowing users to prevent voice pick applications from recognizing non-voice pick conversations.</li> <li>▶ User-replaceable pads and windscreens maximize comfort and hygiene</li> <li>▶ 15 hours of battery power</li> </ul>	<p>See HS2100/HS3100 Accessories Document for headset accessories</p>
<p>various Bluetooth models B550-XT B350-XT C400-XT C300-XT  (3rd party) *  <a href="http://www.blueparrott.com">http://www.blueparrott.com</a></p>		<p>BlueParrott Bluetooth Headsets</p>	<ul style="list-style-type: none"> <li>▶ Various Bluetooth models available with options that include: <ul style="list-style-type: none"> <li>- Blocking out 96% of background noise</li> <li>- Over 24 hours of talk time</li> <li>- NFC Tap to Pair capable</li> <li>- Bluetooth wireless range capable up to 300 ft.</li> <li>- Convertible wearing options: over the head, behind the neck.</li> </ul> </li> </ul> <p>See BlueParrot site for model specific options.</p>	
<p>APTT1 or APTT2 (3rd party) *  <a href="https://www.aina-wireless.com/">https://www.aina-wireless.com/</a></p>		<p>Aina Push-To-Talk (PTT) Bluetooth Voice Responder Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> <li>▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support).</li> <li>▶ Includes clip for attaching device to clothing for lapel speaker/mic usage.</li> <li>▶ Features several buttons which the application developers can assign to different functions.</li> <li>▶ Users can remotely control functions such as push-to-talk, phone calls, channel switching and emergency alerts.</li> <li>▶ Device is ruggedized, MIL-STD 810G and IP67.</li> <li>▶ Long lasting battery designed for 24 hour approx battery life. Can be recharged via micro-USB port.</li> <li>▶ Includes 3.5mm headset jack allowing headphones to be connected for keeping conversations more private.</li> <li>▶ Can be easily paired to mobile computer using NFC tap-to-pair.</li> </ul>	




<p>BTR-155 (3rd party) *</p> <p><a href="https://www.savoxaccessories.com">https://www.savoxaccessories.com</a></p>		<p>Savox BTR-155 Bluetooth Remote Speaker/Mic (RSM)</p>	<ul style="list-style-type: none"> <li>▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support).</li> <li>▶ Includes clip for attaching device to clothing for lapel speaker/mic usage.</li> <li>▶ Rugged wireless speaker microphone IP55.</li> <li>▶ Allows cable-free movement</li> <li>▶ Familiar speaker microphone functions; PTT and volume buttons</li> <li>▶ Includes 2.5mm headset jack allowing headphones to be connected for keeping conversations more private.</li> <li>▶ LED status indication</li> <li>▶ High speaker volume</li> <li>▶ Includes: <ul style="list-style-type: none"> <li>- Savox RSM</li> <li>- Modular Wired earpiece</li> <li>- Wall Charger</li> <li>- USB Cable</li> <li>- Quick Start Guide</li> <li>- Carrying Strap</li> </ul> </li> </ul>	
<p>various (3rd party) *</p> <p><a href="http://stonemountainltd.com">http://stonemountainltd.com</a></p>		<p>Stone Mountain BluSkye Bluetooth Remote Speaker Mic (RSM)</p>	<ul style="list-style-type: none"> <li>▶ Bluetooth speaker-microphone designed to work with different walkie talkie style Push-to-Talk applications, including Zebra PTT Pro (check with Zebra PTT Pro engineering team for current device/OS support).</li> <li>▶ Device is ruggedized, MIL-STD 810G and IP68.</li> </ul>	

**Power Cords/Power Supplies**

**AC Cords and Power Supplies**





Part Number	Picture	Description	Notes	Required Items
CBL-DC-388A1-01		DC Power Cord	<ul style="list-style-type: none"> <li>▶ Used to power Single Slot Cradles and 4-Slot Battery Chargers when using Level VI Efficiency power supply (PWR-BGA12V50W0WW)</li> <li>▶ Cable length is 1.8 meters</li> <li>▶ NOTE: All cradles are packaged as a kit which includes this cable.</li> </ul>	
CBL-DC-388A2-01		DC Power Cord for Workstation Cradles	<ul style="list-style-type: none"> <li>▶ Used along with Power Supply PWR-BGA12V50W0WW to power Workstation Cradle (CRD-NTC5X-1SNWS-01).</li> <li>▶ Barrel Jack connector is straight and ferrite is in a different location vs. L-shaped connector on CBL-DC-388A1-01.</li> <li>▶ Cable length is 1.8 meters</li> <li>▶ NOTE: CBL-DC-388A1-01 may also be used with Workstation Cradles, but CBL-DC-388A2-01 is recommended to provide easier installation of peripheral cables and the cradle's port cover.</li> </ul>	




PWR-BGA12V50W0WW		Power Supply	<ul style="list-style-type: none"> <li>▶ Replaces PWRS-14000-148R</li> <li>▶ Used to power Single Slot Cradle and 4-Slot Battery Charger</li> <li>▶ 100-240 VAC, 12VDC, 3.33A</li> <li>▶ Level VI Efficiency rated</li> <li>▶ NOTE: All cradles are packaged as a kit which includes this power supply.</li> </ul>	<ul style="list-style-type: none"> <li>▶ DC Power Cord (CBL-DC-388A1-01)</li> <li>▶ AC Line Cord (23844-00-00R or country specific version)</li> </ul>
KIT-PWR-12V50W		Power Supply Kit	<ul style="list-style-type: none"> <li>▶ Includes Power Supply (PWR-BGA12V50W0WW) and DC Line Cord (CBL-DC-388A1-01)</li> <li>▶ NOTE: All cradles are packaged as a kit which includes this kit.</li> </ul>	<ul style="list-style-type: none"> <li>▶ AC Line Cord (23844-00-00R or country specific version)</li> </ul>
CBL-DC-381A1-01		DC Power Cord	<ul style="list-style-type: none"> <li>▶ Used to power 5-Slot ShareCradles when using Level VI Efficiency power supply (PWR-BGA12V108W0WW)</li> <li>▶ NOTE: All cradles are packaged as a kit which includes this cable.</li> <li>▶ This cable does not include the black extension release latch which is not required when used on Multi-Slot ShareCradles.</li> </ul>	
CBL-DC-382A1-01		DC Power Cord	<ul style="list-style-type: none"> <li>▶ Used to power 5-Slot ShareCradles when using Level VI Efficiency power supply (PWR-BGA12V108W0WW)</li> <li>▶ Cable has black extension tab for releasing the cable from the back of the cradle. This isn't required when using Multi-Slot ShareCradles.</li> <li>▶ CBL-DC-381A1-01 is normally used with TC53/TC58 multi-device cradles.</li> </ul>	
CBL-DC-523A1-01		2-Way DC Y Power Cord	<ul style="list-style-type: none"> <li>▶ Used to power two 4-Slot Battery Chargers from one Power Supply (PWR-BGA12V108W0WW)</li> </ul>	
PWR-BGA12V108W0WW		Power Supply	<ul style="list-style-type: none"> <li>▶ Replaces PWRS-14000-241R</li> <li>▶ Used to power 5-Slot ShareCradles or two 4-Slot Spare Battery Chargers</li> <li>▶ 9A, 108W</li> <li>▶ Level VI Efficiency rated</li> <li>▶ NOTE: All cradles are packaged as a kit which includes this power supply.</li> </ul>	<ul style="list-style-type: none"> <li>▶ DC Line Cord (CBL-DC-381A1-01 or CBL-DC-523A1-01)</li> <li>▶ AC Line Cord (23844-00-00R or country specific version)</li> </ul>
PWR-BGA24V150W1WW		Power Supply for Point of Sale (PoS) Cradle	<ul style="list-style-type: none"> <li>▶ Used to power Point of Sale (PoS) Cradle (CRD-NTC5X-1SNHP-01)</li> <li>▶ 24V, 6.25A, 150W output</li> </ul>	
23844-00-00R		AC Line Cord	<ul style="list-style-type: none"> <li>▶ Used to power Cradles.</li> <li>▶ This AC Line Cord is for use in North America. See the <b>AC Line Cords by Country</b> TAG for comparable line cords to use in other countries.</li> </ul>	

<p>PWR-WUA5V12W0US (US plug style) PWR-WUA5V12W0GB (UK plug style) PWR-WUA5V12W0EU (EU plug style) PWR-WUA5V12W0AU (Australia plug style) PWR-WUA5V12W0CN (China plug style) PWR-WUA5V12W0IN (India plug style) PWR-WUA5V12W0KR (Korea plug style) PWR-WUA5V12W0BR (Brazil plug style) PWR-WUA5V12W0LA (Argentina/Chile/Mexico plug styles)</p>		<p>USB Power Supply</p>	<ul style="list-style-type: none"> <li>▶ Used with USB-C Cable (CBL-TC5X-USBC2A-01) to charge device.</li> <li>▶ Provides higher current (2.5A) for faster charging</li> <li>▶ 100-240 VAC, 5 V, 2.5 A</li> </ul>	
---	---	-------------------------	---	--






**In-Vehicle Power Supplies**

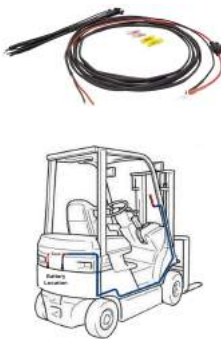

Part Number	Picture	Description	Notes	Required Items
<p>CHG-AUTO-USB1-01 CHG-AUTO-USB1-BR (for Brazil)</p>		<p>USB Cigarette Lighter Adapter</p>	<ul style="list-style-type: none"> <li>▶ Used with USB-C Cable (CBL-TC5X-USBC2A-01) to charge device.</li> <li>▶ Includes two USB A ports providing higher current (2.5A) for faster charging</li> </ul>	
<p>CHG-AUTO-CLA1-01</p>		<p>Cigarette Lighter Auto Charger Cable for Vehicle Cradle</p>	<ul style="list-style-type: none"> <li>▶ 12/24V</li> <li>▶ Includes tab on Barrel jack end for ensuring a reliable connection to Vehicle Cradle (CRD-TC58-WCVC-01).</li> <li>▶ Only compatible with Vehicle Cradle (CRD-TC58-WCVC-01).</li> </ul>	
<p>CHG-AUTO-HWIRE1-01</p>		<p>Hard Wired Auto Charger Cable for Vehicle Cradle</p>	<ul style="list-style-type: none"> <li>▶ 12/24V</li> <li>▶ Includes tab on Barrel jack end for ensuring a reliable connection to Vehicle Cradle (CRD-TC58-WCVC-01).</li> <li>▶ Bare wire end connects directly to vehicle power source.</li> <li>▶ Only compatible with Vehicle Cradle (CRD-TC58-WCVC-01)</li> <li>▶ Approximate cable length is 13 ft.</li> </ul>	
<p>CBL-TC7X-GFS-01</p>		<p>Zebra Legacy Vehicle Cradle Power Adapter Cable</p>	<ul style="list-style-type: none"> <li>▶ Allows Vehicle Cradle (CRD-TC58-WCVC-01) to use power cables from legacy Zebra device vehicle cradles including: MC5x/MC6x, MC7x, MC9x-Brick, MC9x-Short, or MC95 which use cable SKUs 25-128973-01R, 25-61987-01R, or 25-128974-01R.</li> <li>▶ Cable length is 11.5"</li> <li>▶ <b>NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cable.</b></li> </ul>	

<p>ADPCBL-TC7X-USPS</p>		<p>Honeywell Legacy Vehicle Cradle Power Adapter Cable</p>	<p>► Allows Vehicle Cradle (CRD-TC58-WCVC-01) to use power cables from legacy Honeywell vehicle cradles providing 12V - typically Honeywell 99ex.</p> <p>► Cable length is about 12".</p> <p>► <b>NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this cable.</b></p>	
<p>VAM-MPP-VHCH1-01 (CPR required for use with TC53/TC58)</p>		<p>Vehicle Charger Cable for Vehicle Cradle and ZQ500/ZQ600 Series Printers</p>	<p>► Charger with charge both the Vehicle Cradle (CRD-TC58-WCVC-01) a ZQ500 or ZQ600 series printer.</p> <p>► Includes the following:  (1) Power Supply (P1093358) which has square locking connector and one USB-A port which can be used to charge an additional device.  (2) cable for charging Vehicle Cradle (CRD-TC58-WCVC-01) (includes tab on Barrel jack end for ensuring a reliable connection to the cradle) and ZQ500/ZQ600 printer  (3) cable for charging legacy TC7X Charging Cable Cup, Serial/Charge Cable, or USB/Charge Cable Cups and ZQ500/ZQ600 printer - will not be used with TC53/TC58.  (4) Cigarette Lighter Adapter power cord  (5) Hard Wired (bare wire) power cord</p> <p>Choose preferred power cord (4) or (5)</p> <p>► <b>NOTE:</b> This charging solution has not been officially validated with the TC53/TC58. Please submit a CPR at <a href="http://cpr.zebra.lan">http://cpr.zebra.lan</a> (Zebra internal site) if you would like to use this cable with the TC53/TC58.</p>	
<p>3PTY-GJ-7300-0467</p> <p><small>NOTE: Products sold that do not bear the Zebra brand name are serviced and supported exclusively by their manufacturers in accordance with terms and conditions packaged with the products. Zebra's Limited Warranty does not apply to products that are not Zebra branded, even if packaged or sold with Zebra products. Please contact the manufacturer directly for technical support and customer service. See PMB 11136 for more info.</small></p>		<p>Lind 12V Isolated Power Supply for Vehicle Cradles, 20-60 VDC</p>	<p>► Typically used when powering Vehicle Cradle (CRD-TC58-WCVC-01) from higher voltage vehicles.</p> <p>► 20-60 VDC input, 12V DC output to cradles.</p> <p>► Optional Forklift Power Supply Clamp (3PTY-GJ-7160-1333) can be used to mount power supply to vehicle. Refer to <b>Common Mounting Accessories</b> TAG for details.</p>	
<p>7300-0466 (12-32 VDC input)</p> <p>7300-0467 (20-60 VDC input)</p> <p>7300-0418 (72-110 VDC input)</p> <p>Gamber Johnson (3rd party) *</p> <p><a href="http://www.gamberjohnson.com">http://www.gamberjohnson.com</a></p>		<p>Lind 12V Isolated Power Supply for Vehicle Cradle</p>	<p>► Typically used when powering Vehicle Cradle (CRD-TC58-WCVC-01) from higher voltage vehicles.</p> <p>► Provides 12V DC output required by cradle.</p>	

<p>3PTY-RAM-GDSCABUSBADC901U (USB-A to 5.5mm DC cable only)</p> <p>3PTY-RAMGDSCHARGEM55V7B1U (10-30V input range)</p> <p>3PTY-RAM-GDSCARGEM55V8BU (30-64V input range)</p> <p>NOTE: Products sold that do not bear the Zebra brand name are serviced and supported exclusively by their manufacturers in accordance with terms and conditions packaged with the products. Zebra's Limited Warranty does not apply to products that are not Zebra branded, even if packaged or sold with Zebra products. Please contact the manufacturer directly for technical support and customer service. See PMB 11136 for more info.</p>		<p>RAM GDS Modular Charger</p>	<ul style="list-style-type: none"> <li>▶ Used to power RAM Vehicle Cradles</li> <li>▶ Charger includes: <ul style="list-style-type: none"> <li>- USB Type-A male connection to 5.5mm DC connector adapter cable</li> <li>- Hard wired power adapter, USB Type-A female connector; 10-30V or 30-64V input range, 5V output</li> </ul> </li> <li>▶ Eases device upgrades by avoiding rewiring, just unplug power connector and attach new charger components</li> </ul>	
<p>various SKUs (3rd party) *</p> <p><a href="https://www.rammount.com">https://www.rammount.com</a></p>		<p>RAM GDS Modular Chargers</p>	<ul style="list-style-type: none"> <li>▶ Used to power RAM Vehicle Cradles</li> <li>▶ Chargers includes: <ul style="list-style-type: none"> <li>- USB Type-A male connection to 5.5mm DC connector adapter cable</li> <li>- Hard wired power adapter, USB Type-A female connector; 10-30V or 30V-64V input range, 5V output</li> </ul> </li> <li>▶ When upgrading devices, avoid rewiring by unplugging power connector and attaching new charger components</li> </ul>	
<p>3PTY-GJ-7300-0482</p> <p>NOTE: Products sold that do not bear the Zebra brand name are serviced and supported exclusively by their manufacturers in accordance with terms and conditions packaged with the products. Zebra's Limited Warranty does not apply to products that are not Zebra branded, even if packaged or sold with Zebra products. Please contact the manufacturer directly for technical support and customer service. See PMB 11136 for more info.</p>		<p>Forklift Wiring Kit</p>	<ul style="list-style-type: none"> <li>▶ Designed to make the install more professional by providing the correct gauge of wire and finishing accessories to complete the install on a forklift.</li> <li>▶ Includes: <ul style="list-style-type: none"> <li>- 15 feet of 12 gauge (AWG) wire (red and black) for handling longer wire runs and varied power applications.</li> <li>- In-line 15 amp fuse protects device from over voltage</li> <li>- Quick connects for attaching 12 gauge wire to 18 gauge power supply wires</li> <li>- (10) 12-inch zip ties for ease of installation</li> </ul> </li> <li>▶ If using this wiring harness for application outside of material handling, a 12 gauge wire at 15 ft long can handle a 30A fuse and customer will need to change the fuse on their own.</li> </ul>	
<b>Batteries</b>				
Part Number	Picture	Description	Notes	Required Items

<p>BTRY-NGTC5TC7-44MA-01 (single)</p> <p>BTRY-NGTC5TC7-44MA-10 (pack of 10)</p> <p>BTRY-NGTC5TC7-44MA-BR (single - for use in Brazil)</p> <p>BTRY-NGTC5TC7-44MA-IN (single - for use in India)</p>		<p>Spare 1X Standard Capacity Battery with PowerPrecision Plus (4680 mAh)</p>  	<ul style="list-style-type: none"> <li>▶ Designed, manufactured &amp; tested to meet rigorous controls &amp; standards</li> <li>▶ Premium-grade cells with higher capacity &amp; longer life cycle</li> <li>▶ Designed to help prevent overcharging &amp; electrical shock</li> <li>▶ Strong &amp; robust housing for optimal performance &amp; durability</li> <li>▶ Information available: <ul style="list-style-type: none"> <li>- Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device.</li> <li>- Advanced State of Health (highly accurate end-of-life prediction)</li> <li>- Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency).</li> </ul> </li> </ul>	
<p>BTRY-NGTC5TC7-44MABLE-01</p> <p>BTRY-NGTC5TC7-44MABLE-BR (for use in Brazil)</p>		<p>Spare 1X Standard Capacity Battery with PowerPrecision Plus (4680 mAh) and <b>BLE beacon</b></p>  	<ul style="list-style-type: none"> <li>▶ Designed, manufactured &amp; tested to meet rigorous controls &amp; standards</li> <li>▶ Premium-grade cells with higher capacity &amp; longer life cycle</li> <li>▶ Designed to help prevent overcharging &amp; electrical shock</li> <li>▶ Strong &amp; robust housing for optimal performance &amp; durability</li> <li>▶ Information available: <ul style="list-style-type: none"> <li>- Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device.</li> <li>- Advanced State of Health (highly accurate end-of-life prediction)</li> <li>- Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency).</li> </ul> </li> <li>▶ Includes Bluetooth beacon allowing device to be located while powered off using solutions like Zebra Device Tracker.</li> <li>▶ Once the battery can no longer power the device the BLE beacon in the battery will continue to beacon for about 7-10 days.</li> <li>▶ Battery purchase is eligible for discounted Device Tracker 1-year or 3-year subscription. See PMB 10837 for details.</li> </ul>	 <p>▶ Typically purchased along with a Device Tracker 1-year or 3-year subscription. Battery is eligible for a discounted Device Tracker subscription:</p> <p>SW-BLE-DT-SP-1YR (1 year) or SW-BLE-DT-SP-3YR (3 year)</p> <p>See PMB 10837 for details.</p> 

<p>BTRY-NGTC5TC7-44MAWC-01</p>		<p>Spare 1X Standard Capacity Battery with PowerPrecision Plus (4680 mAh) and <b>Wireless Charging</b></p> 	<ul style="list-style-type: none"> <li>▶ Designed, manufactured &amp; tested to meet rigorous controls &amp; standards</li> <li>▶ Premium-grade cells with higher capacity &amp; longer life cycle</li> <li>▶ Designed to help prevent overcharging &amp; electrical shock</li> <li>▶ Strong &amp; robust housing for optimal performance &amp; durability</li> <li>▶ Information available: <ul style="list-style-type: none"> <li>- Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device).</li> <li>- Advanced State of Health (highly accurate end-of-life prediction)</li> <li>- Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency).</li> </ul> </li> <li>▶ Includes support for wireless charging. Requires TC58 Premium config which includes wireless charging circuitry.</li> </ul>	
<p>BTRY-NGTC5TC7-PYMT</p>		<p>1X Standard Capacity Battery with PowerPrecision Plus (4680 mAh) and <b>Payment Support</b></p>  	<ul style="list-style-type: none"> <li>▶ Battery includes slot for integration with PD20 payment device.</li> <li>▶ Includes two Torx T5 screws to secure PD20 in Battery.</li> <li>▶ Compatible with: <ul style="list-style-type: none"> <li>- Rugged Boot</li> <li>- Soft Holster</li> </ul> </li> <li>▶ Not compatible with: <ul style="list-style-type: none"> <li>- hand strap</li> <li>- other snap-on accessories</li> <li>- soft goods like arm mounts</li> <li>- vehicle cradles</li> <li>- Workstation Connect and PoS cradles</li> <li>- Spare Battery Chargers - battery must be charged while in device.</li> </ul> </li> <li>▶ Designed, manufactured &amp; tested to meet rigorous controls &amp; standards</li> <li>▶ Premium-grade cells with higher capacity &amp; longer life cycle</li> <li>▶ Designed to help prevent overcharging &amp; electrical shock</li> <li>▶ Strong &amp; robust housing for optimal performance &amp; durability</li> <li>▶ Information available: <ul style="list-style-type: none"> <li>- Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device).</li> <li>- Advanced State of Health (highly accurate end-of-life prediction)</li> <li>- Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency).</li> </ul> </li> </ul>	

<p>BTRY-NGTC5TC7-66MA-01</p> <p>BTRY-NGTC5TC7-66MA-BR (for use in Brazil)</p> <p>BTRY-NGTC5TC7-66MA-IN (for use in India)</p>		<p>Spare 1.5X Extended Capacity Battery with PowerPrecision <b>Plus</b> (7000 mAh)</p> 	<ul style="list-style-type: none"> <li>▶ Designed, manufactured &amp; tested to meet rigorous controls &amp; standards</li> <li>▶ Premium-grade cells with higher capacity &amp; longer life cycle</li> <li>▶ Designed to help prevent overcharging &amp; electrical shock</li> <li>▶ Strong &amp; robust housing for optimal performance &amp; durability</li> <li>▶ Information available: <ul style="list-style-type: none"> <li>- Advanced state of Charge (shows the remaining battery power based on two factors: present charge and present real-time usage patterns of the device.</li> <li>- Advanced State of Health (highly accurate end-of-life prediction)</li> <li>- Dynamic usage patterns are constantly calculated, factoring in criteria such as the applications that are in use and scanning frequency).</li> </ul> </li> </ul>	
---	---	--	---	--